



Flag-Extender™ Assembly Drawing (Rod only)

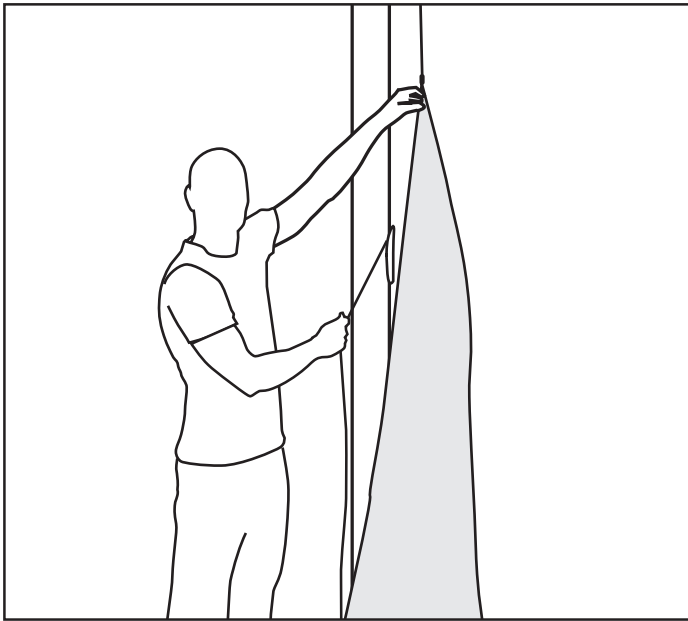


- ① Hoist the flag to a level where you can still reach its upper edge.

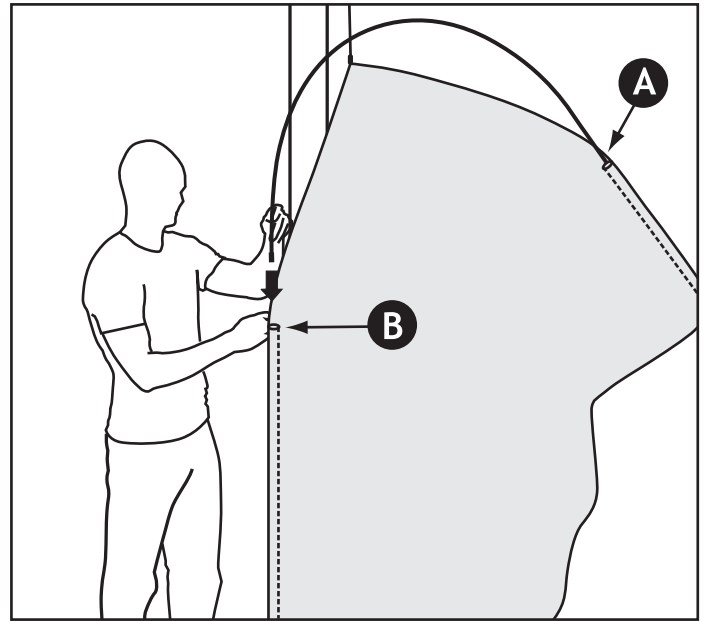

- ② There are 2 pockets on the flag. Pocket A and pocket B are for the long rod.

Push one end of the flexible rod to the bottom of pocket A.
Bend the rod and push its other end to the bottom of pocket B.

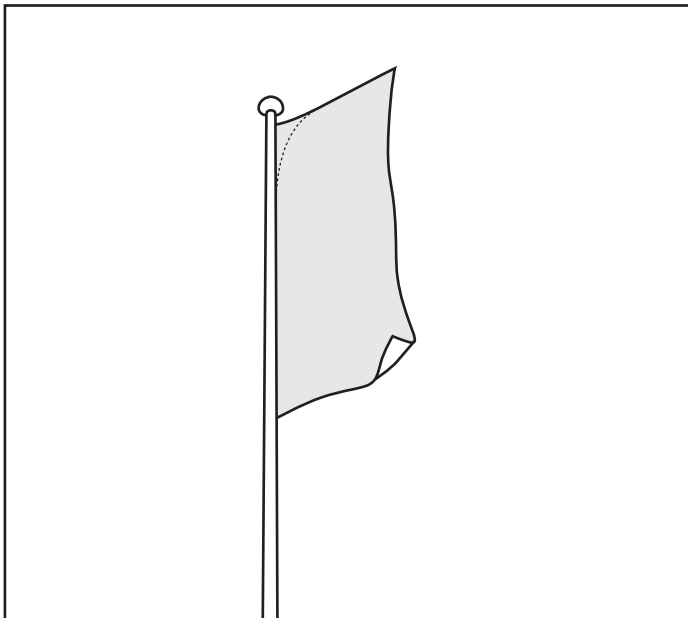

- ③ Hoist the flag in the usual manner.

